




* opcijski
produžetak

* opcijski produžetak u standardnom
sastavu crpne stanice



- el. ormarić
- signalizacija napajanja
 - signalizacija rada crpke
 - signalizacija motorne zaštite
 - alarm visoki nivo,
zvučni i svjetlosni
 - elektronska motorna zaštita
 - zvučni alarm visokog nivoa
 - beznaponski kontakt
za dislocirani alarm
 - glavni prekidač
 - IP 55

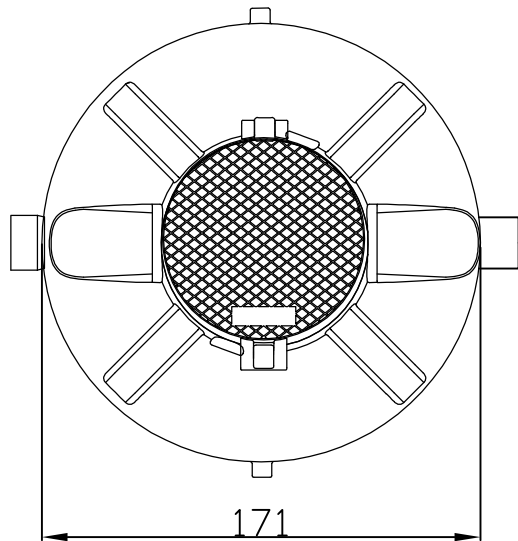

Aquos Eco d.o.o.
www.aquoseco.hr

CRPNA STANICA
tip AQ 3000 NPI
Ø ul/iz 160/80

Projekt:	4900-30	Norma HR/EU:	HRN EN 12050	Naapajanje /snaga:	MDK:
Datum:		Uredio:		Ukupno stranica:	Sljedeća stranica: